


不锈钢

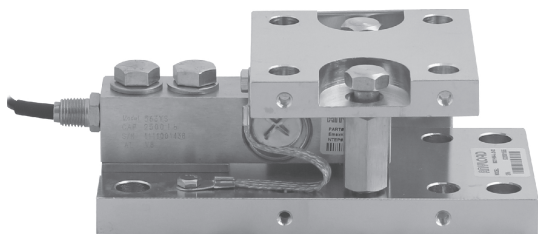

特点:




- 与悬臂梁式称重传感器563YS配套使用
- 量程: 500lb-15Klb/250kg-10t
- 反升力及防过载保护
- 摆柱受力设计
- 侧挡块装配设计

称重传感器获得:



模块不含称重传感器。

称重模块

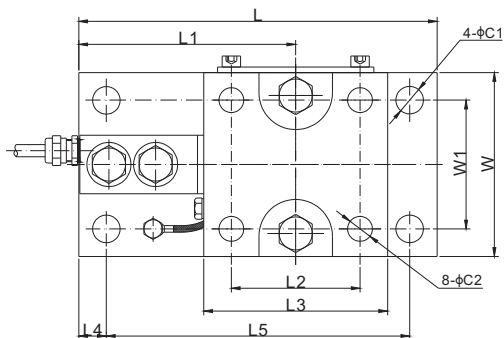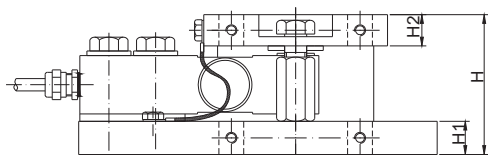

尺寸

量程	C1	C2	H	H1	H2	L	L1	L2	L3	L4	L5	W	W1
lb/inches													
500-4,000;SE5,000	0.59	0.53	2.99	0.71	0.67	7.68	4.65	2.76	3.94	0.59	6.50	3.94	2.76
5,000-10,000	0.71	0.59	4.33	1.06	0.98	9.57	6.00	3.35	4.72	0.75	8.07	4.72	3.35
15,000	0.87	0.79	5.73	1.42	1.26	12.52	7.76	4.09	5.98	1.00	10.52	5.98	4.09
kg/mm													
250-2,000	15.0	13.5	76.0	18.0	17.0	195.0	118.0	70.0	100.0	15.0	165.1	100.0	70.0
3,000-5,000	18.0	15.0	110.0	27.0	25.0	243.0	152.5	85.0	120.0	19.0	205.0	120.0	85.0
10,000	22.0	20.0	145.5	36.0	32.0	318.0	197.0	104.0	152.0	25.4	267.2	152.0	104.0

货号

量程	货号	毛重(kg)
500lb-SE5Klb.....	563YSM3-(0.5-SE5)Klb-02.....	4.2
5Klb-10Klb.....	563YSM3-(5-10)Klb-02.....	9.5
15Klb.....	563YSM3-15Klb-02.....	22.0
250kg-2t.....	563YSM3-(250kg-2t)-02.....	4.2
3t-5t.....	563YSM3-(3-5)t-02.....	9.5
10t.....	563YSM3-10t-02.....	22.0